


Fiche Produit

FILM DE PROTECTION DE SURFACE

Film anti-rayure et anti-impact.

Product No.: **7510**

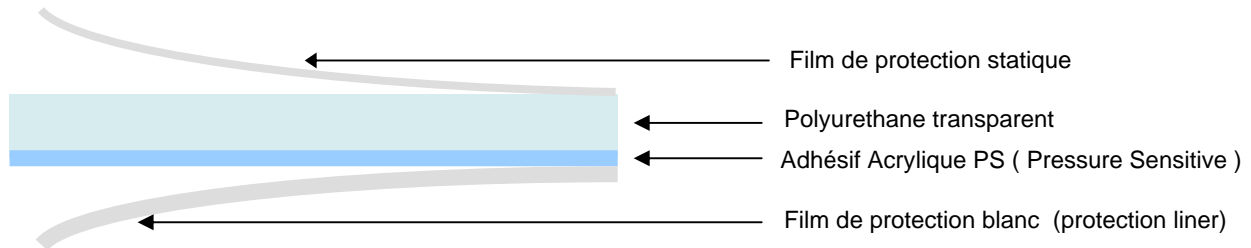

Description:

CARSKIN – Paint Protection Tape is a 6 mil (150 micron) non-yellowing urethane film coated with an aggressive removable acrylic adhesive system. This adhesive system is designed to remove without adhesive transfer to the applied surface and no damage to painted or varnished surfaces.

Applications:

Protection of smooth surfaces (metal, formica, acrylic, glass, marble, automotive paint) against scratching or chipping due to stone and pebbles, bug and environmental damage,, and abrasion. Due to the clarity and high gloss finish of this product, CARSKIN does not alter the aesthetics of the surfaces.

Features & Benefits

- *High performance surface protection tape is ideal for use on painted or unpainted materials, gel coat, fiberglass or other smooth surfaces*
- *Cuts and installs easily*
- *Maintains clarity, guaranteed not to yellow or crack with UV or salt spray exposure*
- *Excels in high heat humidity environmental conditions*

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness (Total)	8.0 mils	203.2 microns	PSTC-133
Thickness (Carrier)	6.0 mils	152.4 microns	PSTC-133
Thickness (Adhesive)	2.0 mils	50.8 microns	PSTC-133
Thickness (Liner)	3.0 mils	76.2 microns	PSTC-133
Peel Adhesion	60 oz/in	16.7 N/25mm	PSTC-101
Shear Strength	>168 hours	>168 hours	PSTC-107
Tensile Strength	54 lb/in	240.3 N/25mm	PSTC-131
Elongation	760 %	760 %	
Minimum Continuous Temperature	-10 °F	-23 °C	
Maximum Continuous Temperature	212 °F	100 °C	
Maximum Intermittent Temperature	240 °F	116 °C	

Available widths : 150, 200, 305, 450, 610, 760, 915, 1220 & 1470 mm